




Toshiba NB250-108 Tastatur Replacement

Instructions to disassemble the keyboard

Written By: Guenter Hildebrandt


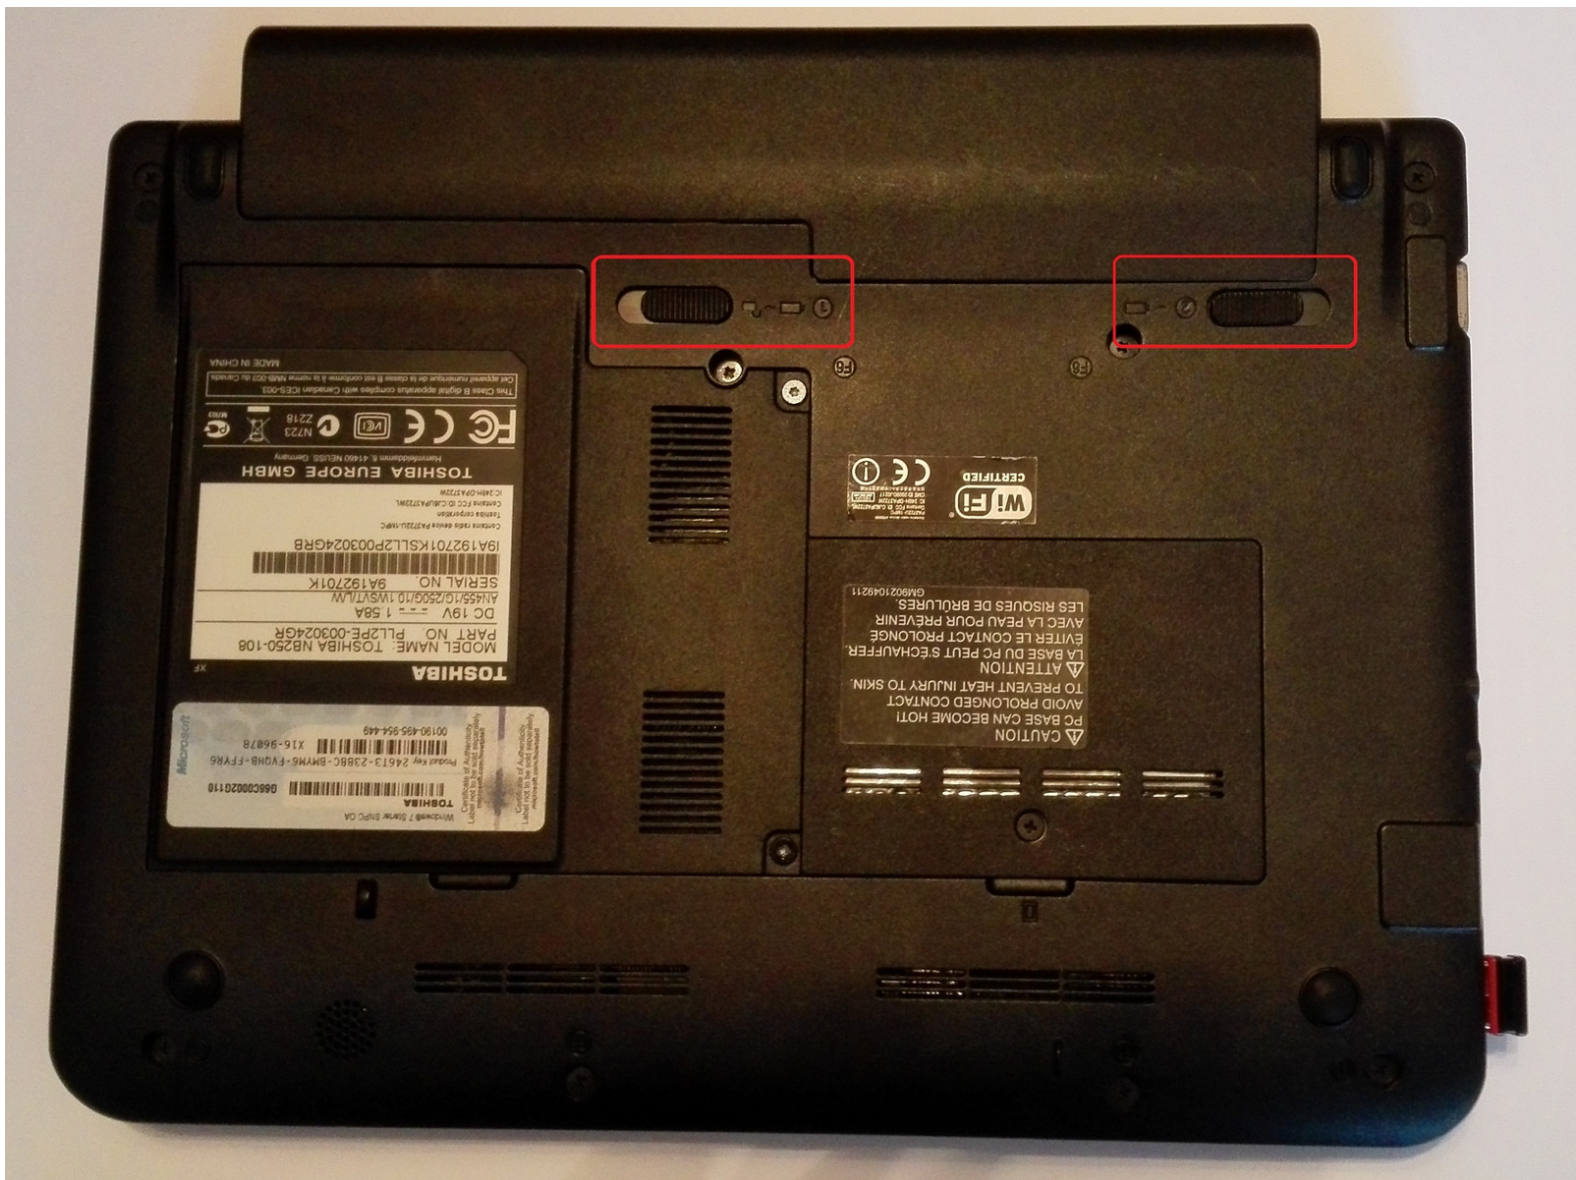




TOOLS:


- [Phillips # 1 screwdriver](#) (1)
-

Step 1 — Remove battery

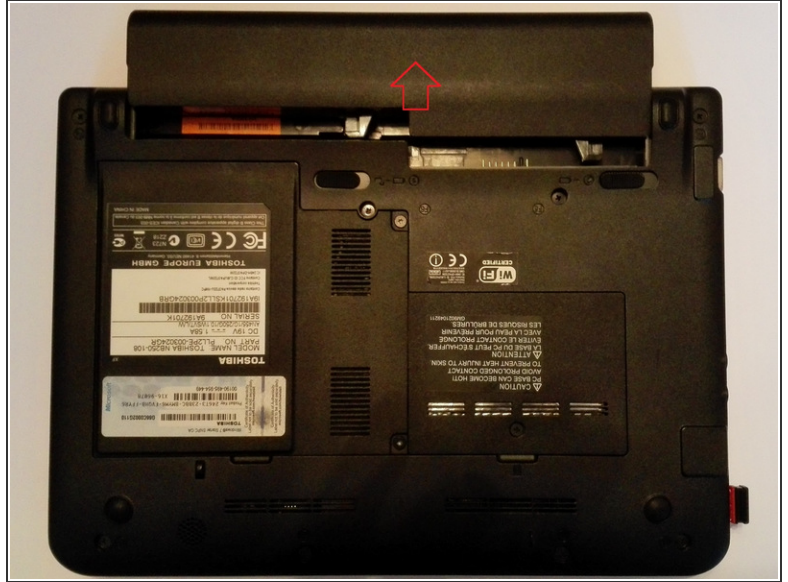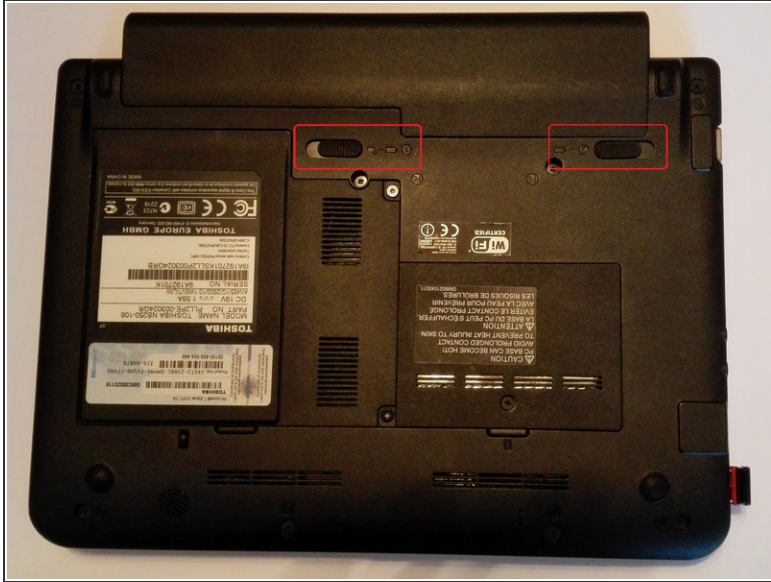

- Save your work.
- Turn off the computer. The LED power indicator is off.
- ⚠ Disconnect all cables connected to the computer and cable equipment.
- Close the display and place the computer upside down as shown in the picture down.
- Slide the safety lock (on the left) to the unlock position (to the left) to enable sharing.
- Slide the battery release latch (right) to the right and hold it in place in order to release the battery pack, and remove the battery pack to the back of the computer.

Step 2 — Remove keyboard

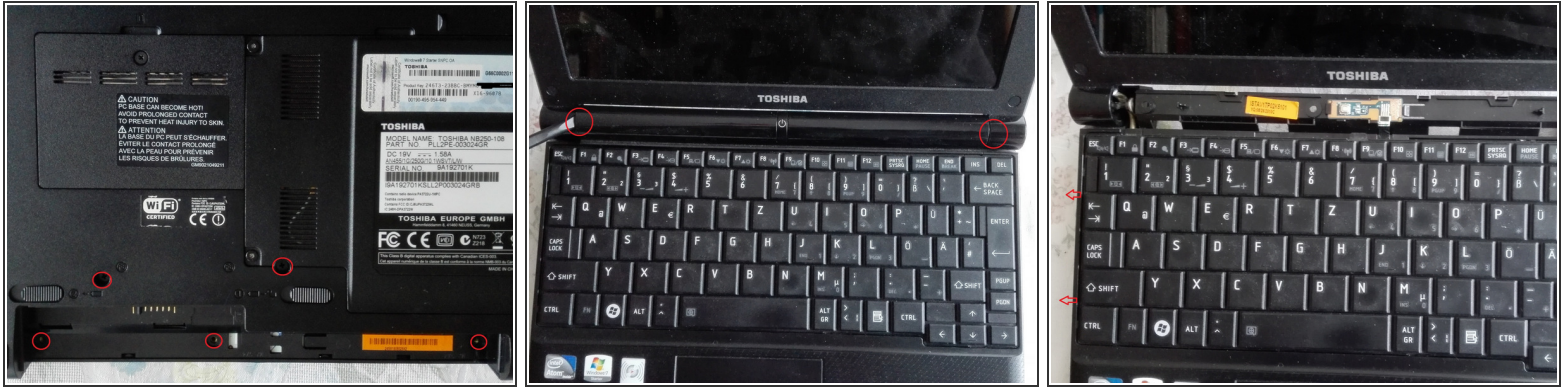

- Remove the 5 screws marked and turn after the unit over and open the screen.
- We will first remove the cover of the switch-on by mutually pry with a spatula these left and right.
- Grasp the keyboard at the top and start on the left side at the marks the keyboard with a spatula pry. Repeat this procedure on the right side.

Step 3 — Remove keyboard cable



⚠ Slide the keyboard gently toward the screen until the connection of the keyboard cable is visible.

- Keep the keyboard with one hand in this position and open by sliding it in the direction of the ribbon cable with the other hand and pointed forceps the black retaining clips.
- Now lets out the ribbon cable pull from the bracket.
- Place the keyboard safely on their work surface.

Arbeite die Schritte in umgekehrter Reihenfolge ab, um dein Gerät wieder zusammenzubauen.

